


Emerson Radio

MODELS - 737A, 737B

CHASSIS - 120172-A
120172-B

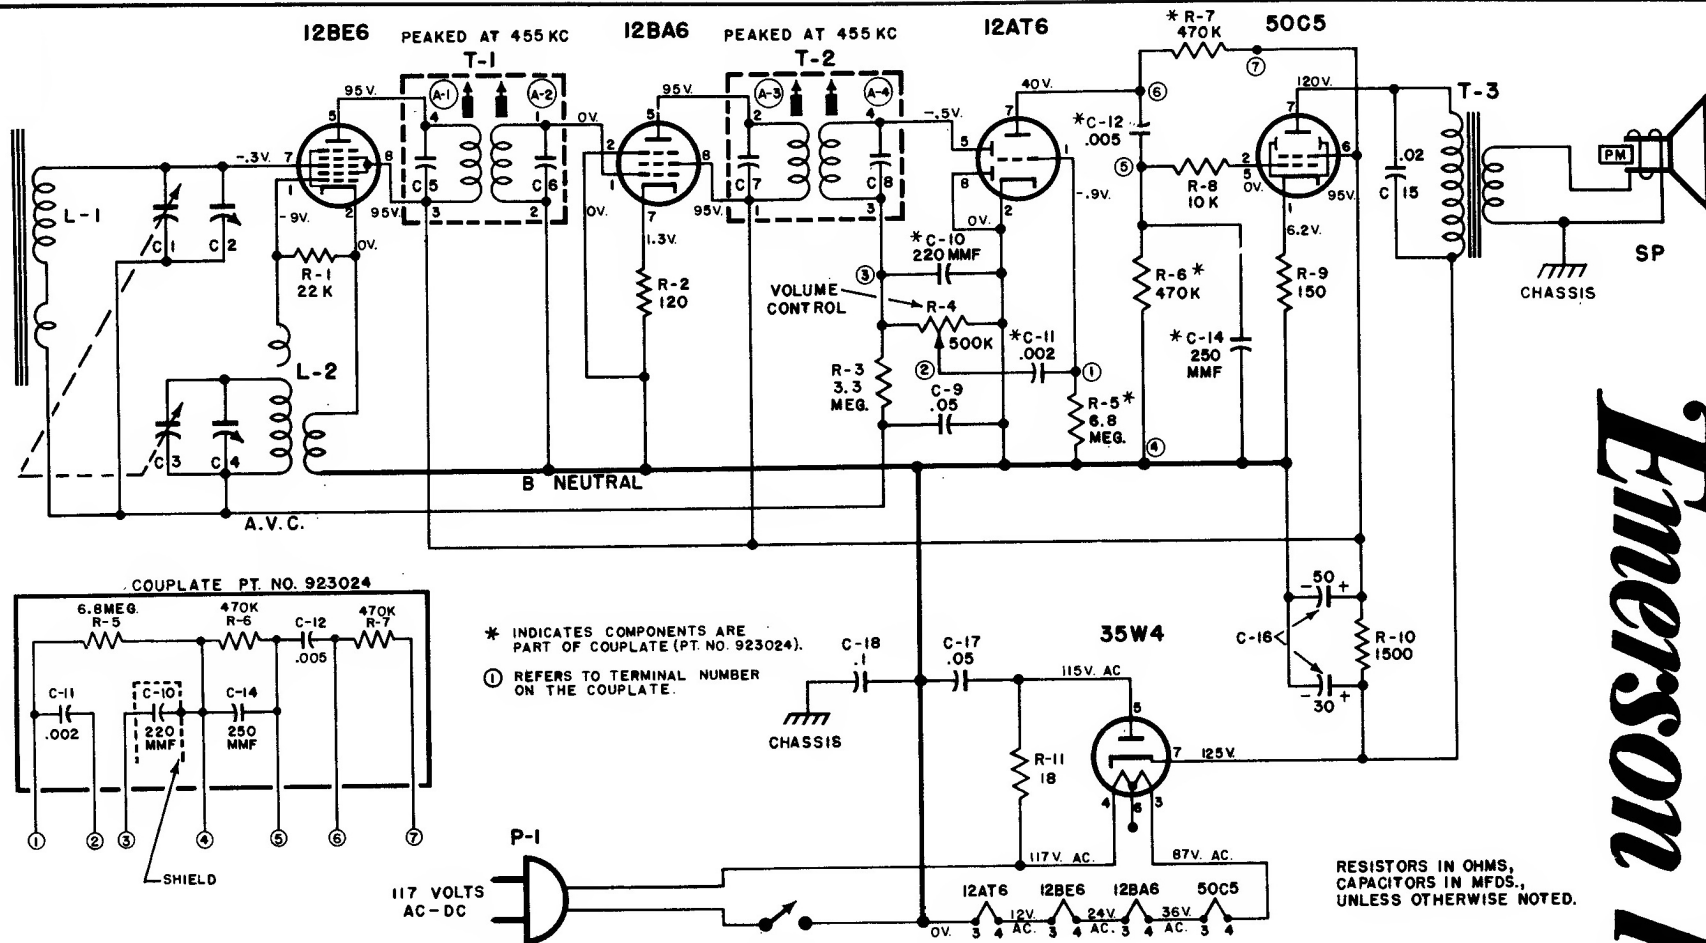

All measurements taken between points and common B neutral (black lead of electrolytic filter condenser).

Volume control at maximum, no signal applied, for voltage measurements.

RESISTANCE READINGS FOR CHASSIS 120172-A AND 120172-B

TUBE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7
12BE6	23K	.5	12	24	1500*	1500*	4 MEG
12BA6	15	0	24	36	1500*	1500*	125
12AT6	6 MEG	0	0	12	500K	0	470K*
50C5	150	470K	36	85	470K	1500*	185*
35W4	N.C.	N.C.	85	115	135	110	0*

*Resistances Measured to Pin 7 of Rectifier 35W4 (B+).

VOLTAGE READINGS ON SCHEMATIC DIAGRAM