





Emerson Radio

MODEL 810B
CHASSIS 120222-B

Model 808B, Chassis 120189B, electrically is identical to Model 810B, Chassis 120222B, with the exception of a "Jack" for connecting "personal listening attachments."

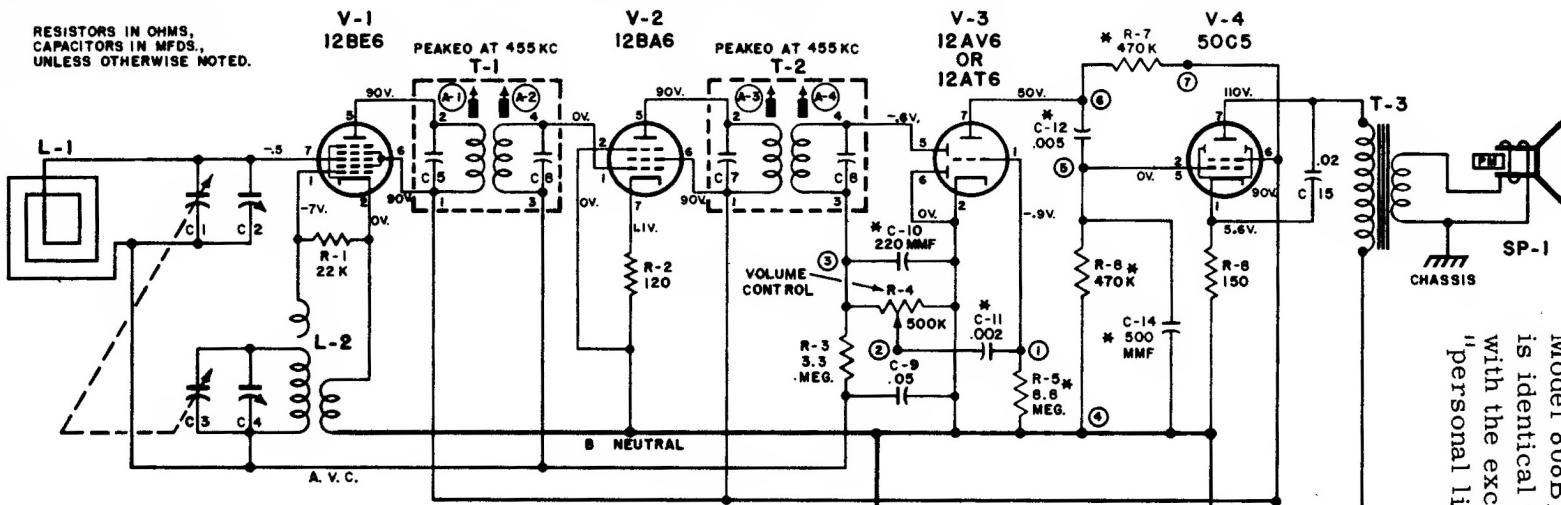

* INDICATES COMPONENTS ARE PART OF COUPLATE (PART NO. 923026)
① REFERS TO TERMINAL NUMBER ON THE COUPLATE.

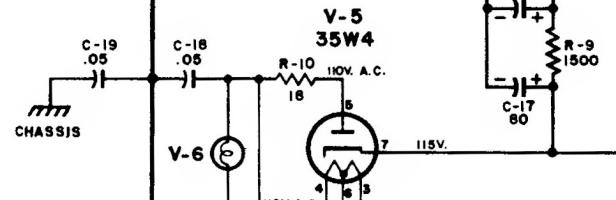


RESISTANCE READINGS

All measurements taken from pin to B neutral unless otherwise indicated.
Resistance measurements taken with:

- Power line cord disconnected from outlet.
- Volume control set for maximum volume.

TUBE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6	PIN 7
12BE6	22K	.6	12	24	1500*	1500*	3.8 meg
12BA6	3.8 meg	0	24	36	1500*	1500*	120
12AV6 or 12AT6	6.8 meg	0	0	12	500K	0	470K
50C5	150	470K	NC	80	470K	1500*	*175
35W4	NC	NC	80	110	120	105	0*

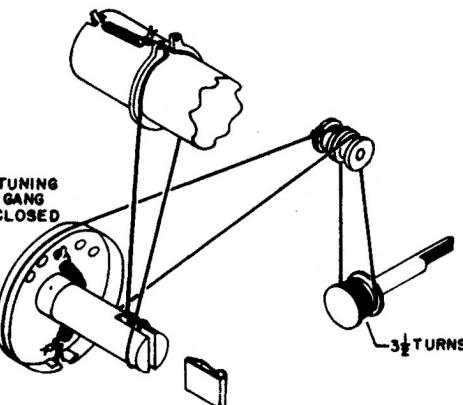

Dial cord stringing.

*Indicates resistances measured to Pin 7 of Rectifier 35W4 (B+).